

Clippard
 INSTRUMENT LABORATORY, Inc.
 Cincinnati, Ohio 45239
Minimatic®
 U.S. PAT. NO'S 3.766.935; 3.766.831 PAT'S PEND.

MADE IN U.S.A.

Pressure Reg. **R701**

Clippard
 INSTRUMENT LABORATORY, Inc.
 Cincinnati, Ohio 45239
Minimatic®
 U.S. PAT. NO'S 3.766.935; 3.766.831 PAT'S PEND.

MADE IN U.S.A.

Flow Control **R501**

- WARNING -

FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE FUSES WITH SAME TYPE AND RATING ONLY.

DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT

CAUTION-HOT
 ALLOW TO COOL
 BEFORE REMOVAL
 HANDLE CAREFULLY-
 DELICATE LAMP FILAMENT

DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT


DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT

MOTOR-SYNCHRONOUS (DM)

CONTINUOUS DUTY THERMAL PROTECTED
 1/35 H.P., 1 PH., 115V.A.C., 50/60 HZ
 1500/1800 R.P.M. .75/.65 AMPS
 CAP 5 MFD 370 VAC
 INSULATION CLASS B
 PART NO. 252193

DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT

DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT




FILLER PLUG & AIR VENT

ABOVE 20°F. USE OIL.
 SPEC. MIL-H-5606
 BELOW 20°F. USE OIL SPEC.
 MIL-H-5606 MIXED WITH 26%
 NAPHTHA SPEC TT-N-95
**CAUTION CLOSE AIR VENT
 WHEN NOT IN USE**

WARNING

FOR-043 ANGLE GEARBOX ASSYS
 USE ONLY HYDRAULIC PUMPS
 THAT HAVE "O" RING TYPE
 GREASE RETENTION SPLINES
 (67WAF200 PUMP OR EQUIVALENT)

SS9013-1167




DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT

DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT

DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT

DANGER
 HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT

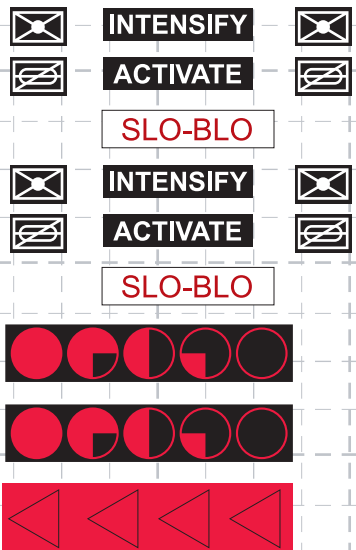

DANGER

HIGH VOLTAGE 1KV
 ELECTRIC SHOCK HAZARD
 REMOVE POWER BEFORE
 REPAIR OR ADJUSTMENT

