

QUADRUINO ROBOT

INDEX

QUADRUINO ROBOT	2
QUADRUINO MK2 (OVERALL DESIGN)	3
COMPONENTS	4
ARDUINO	8
ARDUINO QUICK GUIDE	9
ARDUINO POWER	<small>eleven</small>
SERVO CONNECTION DIAGRAM	12
CONNECTION OF THE ULTRASOUND MODULE, HC-SR04	13
QUADRUINO GENERAL CIRCUIT	14
IMAGES OF THE CONSTRUCTION	16
QUADRUINO VIDEOS	16

Quadruino Robot

QUADRUINO ROBOT

Quadruino is a quadruped walking robot controlled by the Arduino microprocessor and with servo actuators.

A quadruped robot is a type of robot that has four legs and resembles the movement of a four-legged animal. These robots are designed to walk, run or even jump, and are used in a variety of applications, such as exploration in difficult terrain, aiding in rescues or simply as educational and research projects.

Quadruped robots can come in varying degrees of complexity, from basic models made from 3D-printed parts like this one to advanced robots that incorporate artificial intelligence technologies and sophisticated sensors.

Arduino is an open source hardware platform consisting of an electronic board and an integrated development environment (IDE). It is designed to make it easy to create electronic and interactive projects in an accessible way for beginners and experts alike.





Arduino hardware consists of a board with a microcontroller and a series of input/output pins that allow the connection of sensors, actuators, and other electronic devices. The Arduino IDE provides a C/C++-based programming environment for uploading code to the board and controlling connected devices.

The combination of a quadruped robot and the Arduino platform could be an exciting project and spark interest in robotics and programming. Using Arduino, you can control the movements and actions of a quadruped robot, and you can program it to perform various tasks.




QUADRUINO MK2 (OVERALL DESIGN)

<https://www.tinkercad.com/things/fZa6mmhZS58>


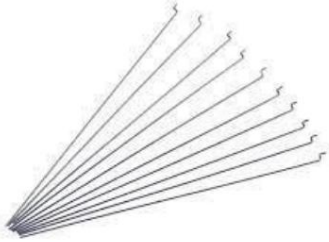


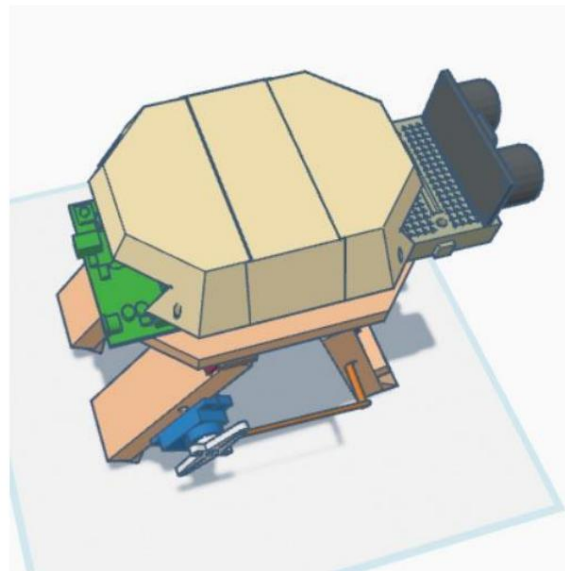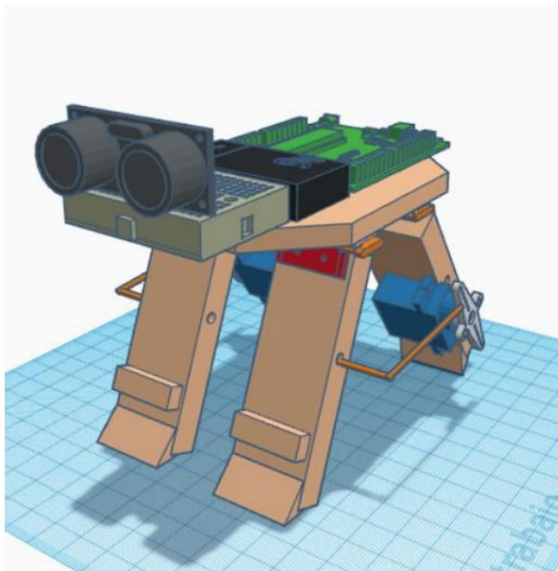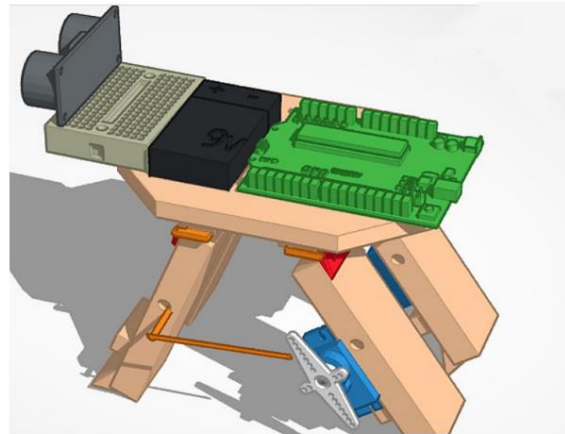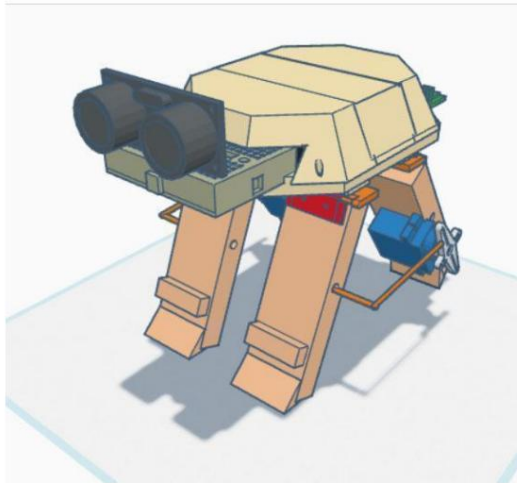Robot Quadruped MK2



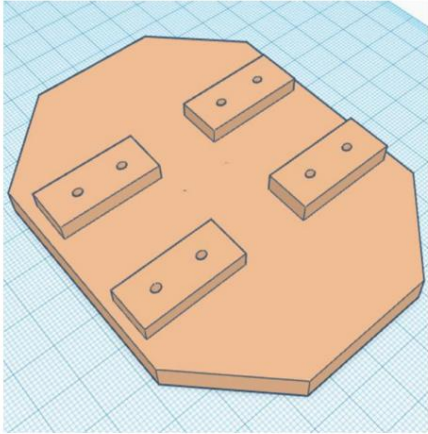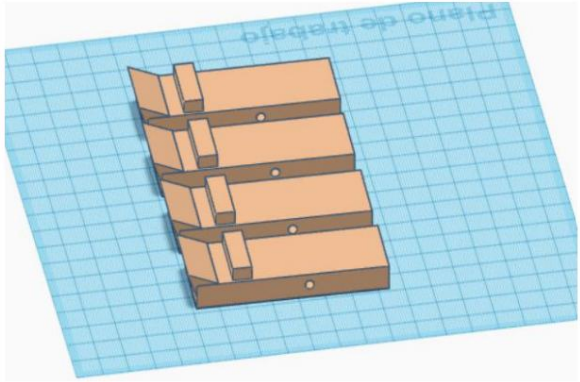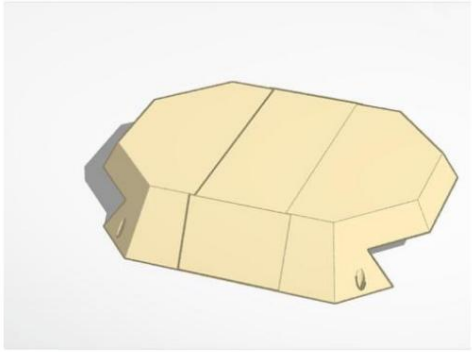

Quadruino Robot

COMPONENTS	
DENOMINATION	IMAGE
Quadruino Base (3D Printing) https://www.tinkercad.com/things/aKz1.IQ.mdb5N	
Quadruino Legs (3D Printing) https://www.tinkercad.com/things/aKz1.IQ.mdb5N	
Quadruino Shell https://www.tinkercad.com/things/3yrjhhPH.EYt-quadruino-shell	Carcasa Quadruino 




Quadruino Robot

<p>Mini Retro hinges €0.75 x 4</p>	
<p>10 Pieces Z Type Direction Gear Stick Diameter 1.2mm Length 20cm Stainless Steel Pull Rod RC Airplane Part (10 Pieces) €2.15 / lot (Bend the rod at a 90° angle and 9 x 5 cm segments)</p>	
<p>1pc SYB-170 Mini Solderless Breadboard Prototype 170 Breakout Points 35*47*8.5mm For DIY Kit €0.37x2</p>	
<p>Rc Mini Micro 9g 1.6KG Servo SG90 for RC 250 450 Helicopter Plane Car Boat for Arduino DIY with Bracket 360 degrees €0.91x2 free return Total:€3.82</p>	

Quadruino Robot

<p>10/20/30/40 CM Dupont Line 40 Pin Male to Male + Male to Female & Female to Female Jumper Wire for Arduino DIY KIT</p> <p>Total: €2.95</p>	<p>IBUW®</p> 
<p>Original Leonardo R3 Microcontroller Development Board Atmega32u4 with Cable USB, Arduino Compatible, Starter Kit DIY</p> <p>Leonardo R3 Set</p> <p>€5.39x1</p>	
<p>10pcs 9V Battery Snap Connector Clip Lead Wires Holder</p> <p>Total: €2.65</p>	
<p>slide switch</p> <p>€0.43</p>	


Quadruino Robot

<p>Panasonic Alkaline Power 6 LR 61 5410853039303 - 9 V battery €278</p>	
<p>Repair Screws, M1.2 M1.4 M2</p>	
<p>1pc HC-SR04 SR04 4Pin Ultrasonic Module Distance Measuring Transducer Sensor €1.09</p>	<p>Ultrasonic Sensor 3.3V-5V 4.5M</p> 
<p>Hot Glue Gun Glue Gun Caliente Mini - Silicone Gun Crafts 20W Glue Gun 7mm*130mm 30 Sticks Glue Gun €11</p>	

Quadrino Robot

ARDUINO

Arduino is an open source electronics creation platform, which is based on free hardware and software that is flexible and easy to use for creators and developers. This platform allows the creation of different types of microcomputers on a single board to which the community of creators can give different types of use.

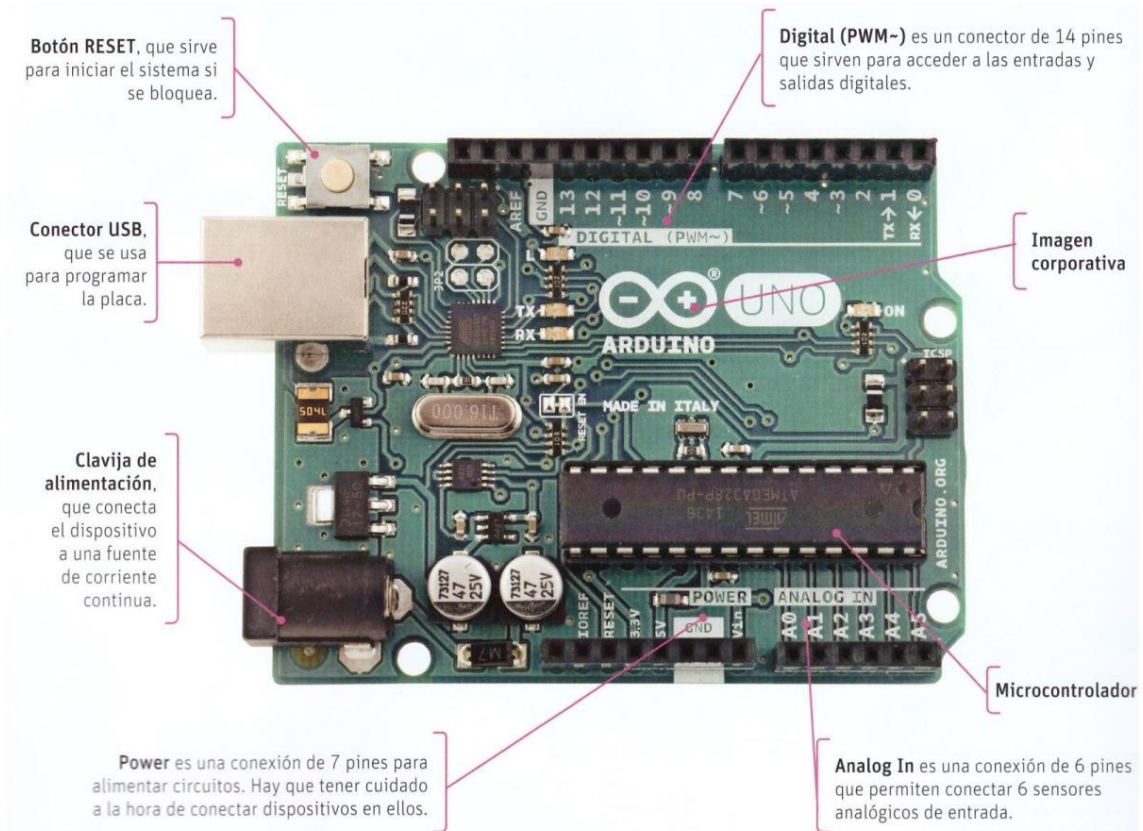

Quadruino Robot

ARDUINO QUICK GUIDE

The card can be powered by an external 6 to 20 volt supply. If supplied with less than 7V, however, the 5V pin can supply less than five volts and the board may be unstable. If more than 12V is used, the voltage regulator can be overheated and damage the board. The recommended range is 7 to 12 volts.

The power pins are as follows:

VIN. Power can be supplied via this pin, or, if power is supplied via from the power socket, access it through this pin.

This pin as output regulates the voltage to 5V. The board can be powered either from the DC power connector (7 – 12 V), the USB connector (5V), or by the VIN pin (7-12V). The voltage supply through the 5V or 3.3V pins does not go through the regulator, and can damage the board. We do not advise this.

3V3. A 3.3 volt supply generated by the on-board regulator. Current consumption maximum is 50 mA.

GND. Ground pins.

IOREF. This pin on the Arduino board provides the voltage reference with which it operates the microcontroller.

Digital inputs and outputs: They are located at the top of the board, they go from 0 to 13, this last pin has an internal resistor included. The digital signal can be on or off (LOW or HIGH). Pins zero and one can be used to load the program on the board. For example, they are used to blink an LED or as an input, a button.

Analog outputs: They are pins 11, 10, 9, 6, 5 and 3, if you look closely they have a curved line next to them, They are called PWM (Pulse Width Modulation) outputs, which are actually digital outputs that they imitate analog outputs, modifying the separation between the different signal pulses. The PWM signal can give different values up to 255, they are used, for example, to vary the

Quadruino Robot

intensity of an LED or operate a servo. It must be said that these pins work as digital inputs or outputs or as analog outputs.

Analog inputs: They are pins A0, A1, A2, A3, A4 and A5 (analog in). They are used for between a signal from an analog sensor, such as a potentiometer or a temperature sensor, which give a variable value. They can also be used as digital pins.

Power Pins:

- GND: They are the ground pins of the board, the negative.
- 5v: This pin supplies 5v
- 3.3v: This pin supplies 3.3v
- Vin: Input voltage, through this pin the board can also be powered.
- RESET: Through this pin you can reset the board
- IOREF: It is used for the board to recognize the type of power required by the shields


We can also find the AREF pin, above all to the left of the digital pins, this pin is used to supply a voltage other than 5v through the digital pins.

There is also the USB connector, to load the program and power the board; and the connector food, to feed her.


ARDUINO POWER

POWER SUPPLY OF THE ARDUINO

BOARD The following image summarizes the methods that we can use to power the Arduino UNO R3.

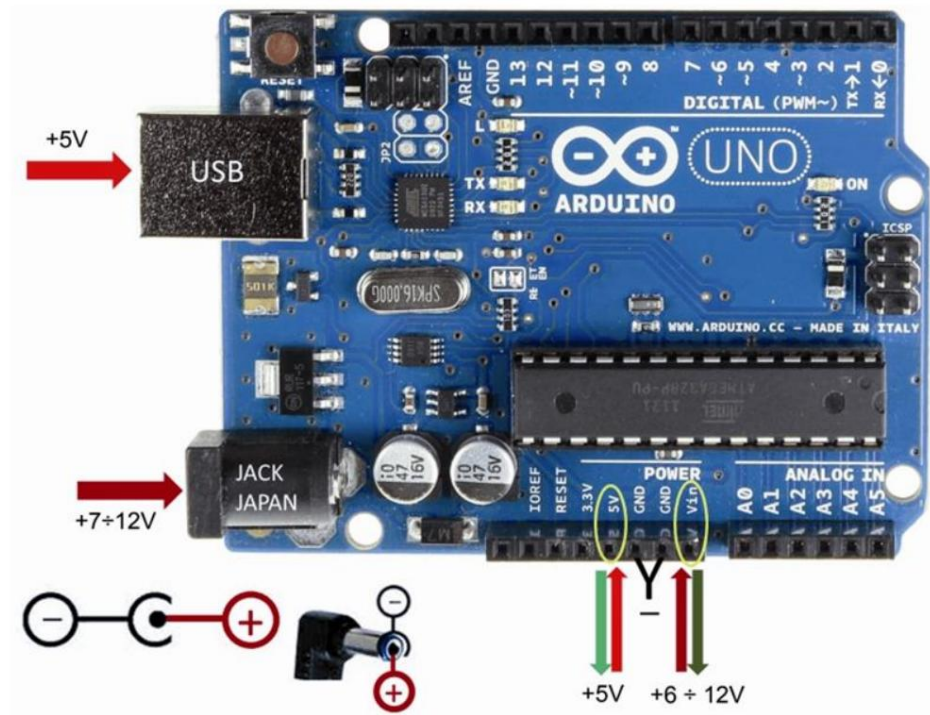


[Jack for Arduino](#)

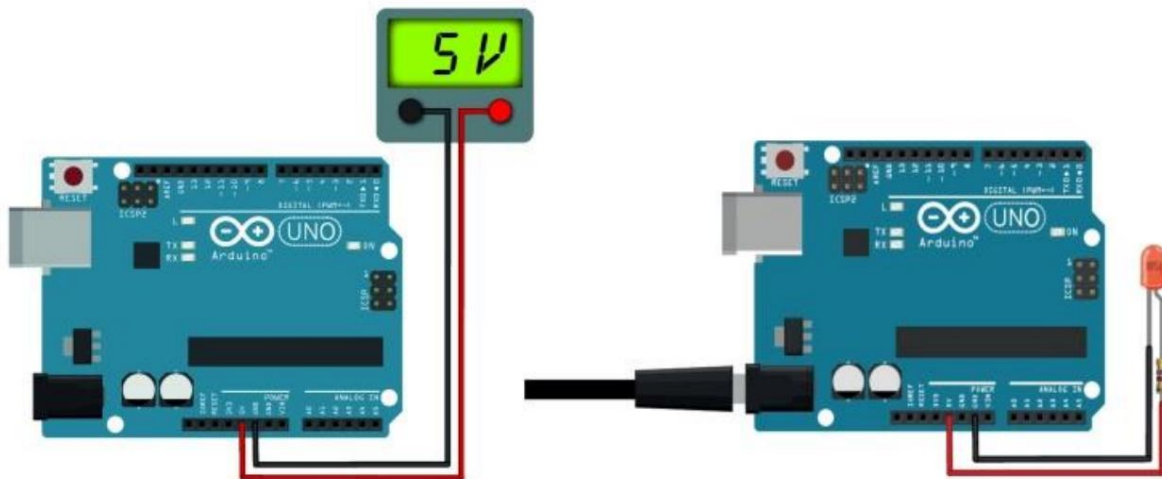



[9v DC battery clip connector to Jack connector for Arduino](#)

SERVO CONNECTION DIAGRAM

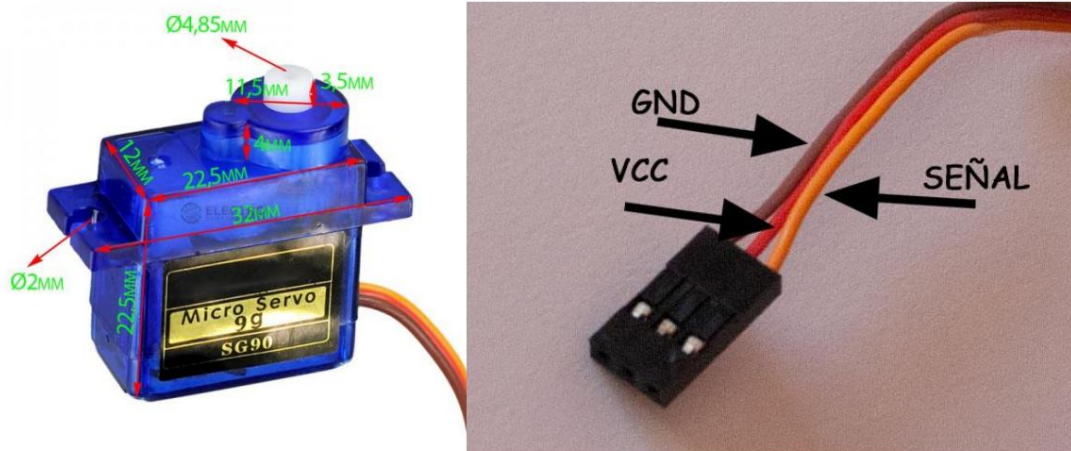

SERVO DIMENSIONS AND CONNECTIONS

To connect two servos to the Arduino board, you can follow the steps below:

1. Identify the digital output pins that you will use on the Arduino board to control the servos. For example, you can use pins 9 and 10.
2. Connect the red (power) wire of one of the servos to pin 9 of the Arduino.
Connect the red wire from the other servo to pin 10 on the Arduino.
3. Connect the black (ground) wire from both servos to the GND (ground) pin of the Arduino.
Make sure all components share a common ground.
4. Connect the signal wires from the servos to the digital output pins corresponding on the Arduino. For the first servo, connect its signal wire (usually yellow or white in color) to pin 9. For the second servo, connect its signal wire to pin 10.

Quadrino Robot

CONNECTION OF THE ULTRASOUND MODULE, HC-SR04




-Vcc: Power pin. (5V)

-Trigger: Trigger pin. This pin is an input, so in the control system, for example Arduino, it has to be connected to an output.


-Echo: This pin is a sensor output, so it must be connected to a control system input.

-Gnd: Negative power pin

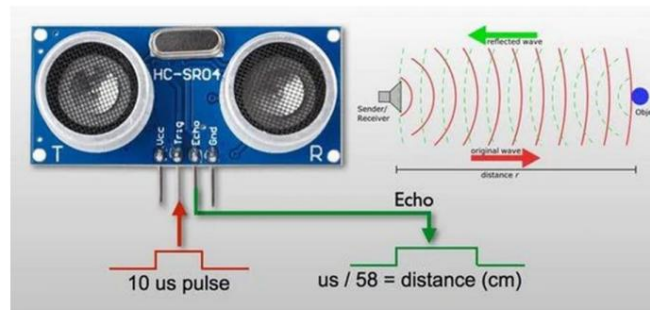


The sensor has 4 pins. VCC and GND connect to the 5V and GND pins on the Arduino, and Trig and Echo connect to any digital pin on the Arduino. Using the Trig pin we send the ultrasonic wave from the transmitter, and with the Echo pin we listen to the reflected signal.

If we receive a reflected pulse, the Echo pin will go low before 38ms. Based on how long the Echo pin is in the HIGH state, we can determine the distance the sound wave has traveled, and therefore the distance from the sensor to the object.

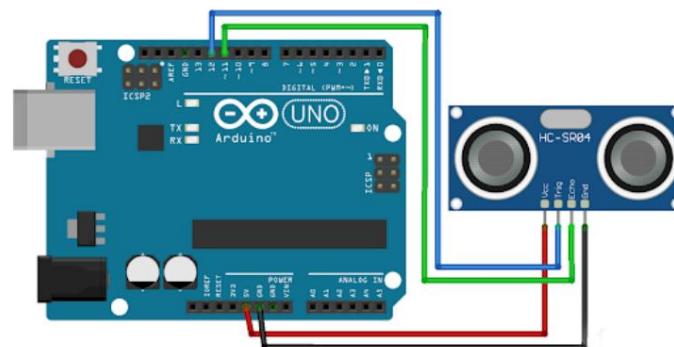

QUADRUINO GENERAL CIRCUIT

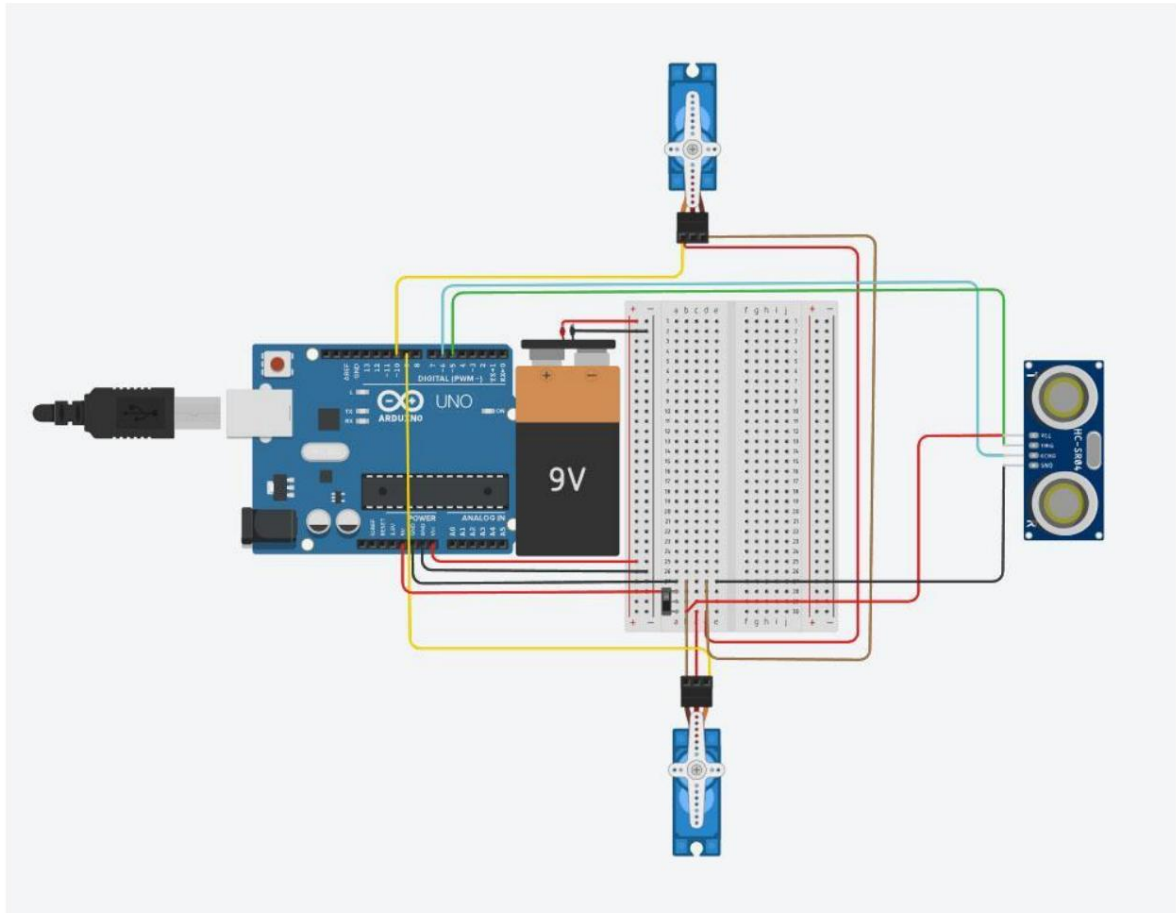

<https://www.tinkercad.com/things/dcf20aXAY9V>

BASIC PROGRAM FOR QUADRUINO

This program uses the Arduino Servo library to control the two servo motors. When the ultrasonic sensor detects an obstacle within 20 cm, servo 1 rotates between 0 and 180 degrees and servo 2 stops at its center position (90 degrees). If the object is more than 20 cm away, both servos rotate alternately between 0 and 180 degrees. You can adjust the turning angles and delay times according to your needs.

```
#include <Servo.h>
```

```
Servo servo1;
Servo servo2;
int trigPin = 5;
int echoPin = 6;
```

```
void setup() {
  servo1.attach(9);
  servo2.attach(10);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
}
```

Quadrino Robot

```
Serial.begin(9600); }
```

```
void loop()
```

```
{ long duration, distance;
```

```
digitalWrite(trigPin, LOW);
```

```
delayMicroseconds(2);
```

```
digitalWrite(trigPin, HIGH);
```

```
delayMicroseconds(10);
```

```
digitalWrite(trigPin, LOW);
```

```
duration = pulseIn(echoPin, HIGH);
```

```
distance = (duration / 2) / 29.1;
```

```
if (distance > 20) { //
```

```
Move servo1 between 45 and 90 degrees
```

```
for (int pos = 45; pos <= 90; pos++)
```

```
{ servo1.write(pos);
```

```
servo2. write(pos);
```

```
delay(15); }
```

```
for (int pos = 90; pos >= 45; pos--)
```

```
{ servo1.write(pos);
```

```
servo2. write(pos);
```

```
delay(15); } }
```

```
else { //
```

```
Stop moving servo2 and keep moving servo1 between 45 and 90 degrees servo2.write(90); //
```

```
Stop servo2 for (int pos = 45; pos <=
```




```
90; pos++) { servo1.write(pos); delay(15); }
```

```
for (int pos = 90;
```

```
pos >= 45;
```

```
pos--) { servo1.write(pos); delay(15); } }
```

IMAGES OF THE CONSTRUCTION

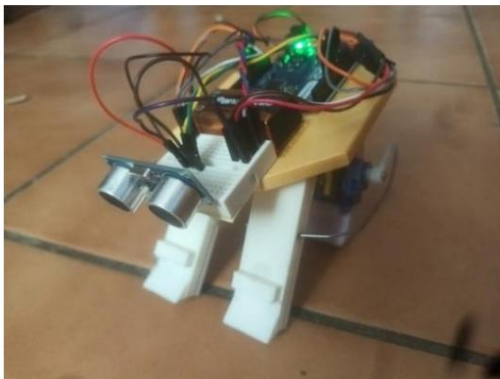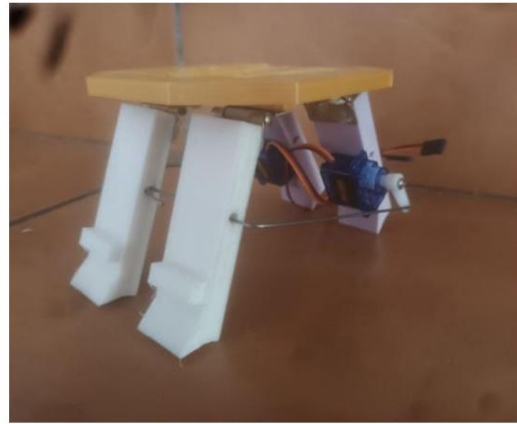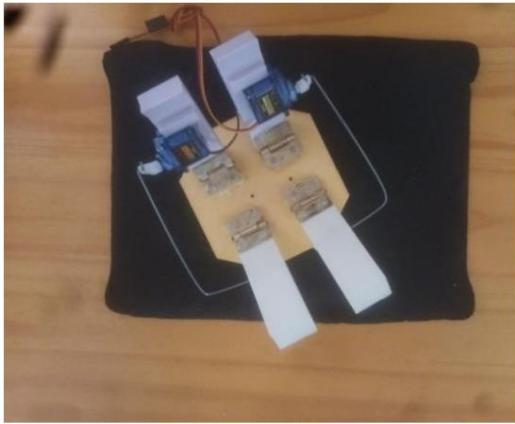

QUADRUINO VIDEOS

<https://youtu.be/pNWBSWQYAWg>

<https://www.youtube.com/watch?v=TJQ5V3J5jA0>

https://www.youtube.com/watch?v=ePan_4MNmls

