INSTRUCTIONS - PAGE | (if there are inconsistancys in the pictures, it is because I made admendments to the design and corrected for missed steps)

GENERAL STARTERS:

- TRACE AND CUT OUT PATTERN, LAYOUT WITH TAYLORS CHALK.
- -YOU WILL NEED A SIZE 16 OR 18 NEEDLE.
- -ALL SEAM TOLERENCES ARE 1/2 UNLESS OTHERWISE NOTED.
- -RIBBON BINDING SEAM TOLERENCE IS 3/8"
- SEAM STITCHING IS 8 TO 10 STITCHES PER INCH.
- -BAR TACKS ARE EXPLAINED ON THE PATTERN
- -DASHED LINES INDICATE STITCHING
- -SEAR ALL EDGES OF CUT WEBBING & RIBBON WITH A CANDLE FLAME!


HIP PAD STEP 2:

THE ONE NOT FACING THE BODY OUTSIDE FABRIC TO OUTSIDE FABRIC AND SEW THE SEAM AND THE BIND THE SEAM, REMEMBERING TO TACK 3 TO 5 TIMES OVER THE WEBBING. PRODUCED

binding Tacks over binding ribbon inside of fabric sewn seam


HIP PAD STEP 1:

TACK THE WEBBING ONTO THE SEAMS OF THE OUTSIDE PEICES OF THE HIP PADS, THEN ADD OPTIONAL MOLLE IF YOU SO CHOOSE.

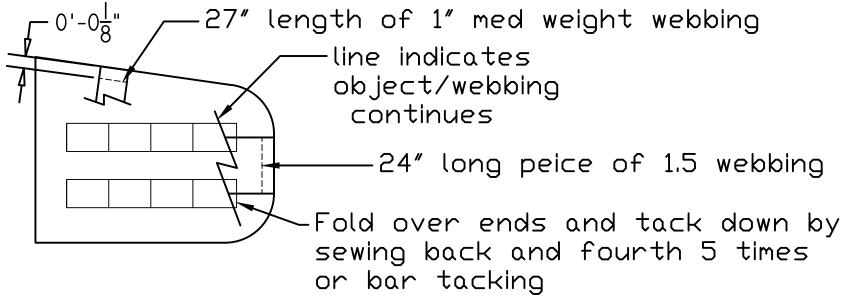

HIP PAD STEP 3:

PLACE THE PIECE OF THE HIP PAD FACING THE BODY ON TOP OF TURN HIP PAD RIGHTSIDE OUT, STUFF THE FOAM PAD INTO THE CLOTH POCKET AND STITCH THE EDGE CLOSED, AND DONE!







РRODUCED BY AN AUTODESK EDUÇATIONAL